



Height: 13 in / 330 mm
 Width: 7.75 in / 197 mm
 Length: 5.5 in / 140 mm
 Weight: 2.6 lb / 1.2 kg



Description

The WPSS wall pack fixture is perfect LED for lighting small exterior spaces.

Applications

Wet Environments	Interior	Wall Mount
Security Lighting	Exterior	

Details

IP Rating	IP65
Materials	Aluminum
Lens	Polycarbonate
LM70 Life	100,000 Hours
Warranty	10 Years
CRI	70+
Certification	UL, DLC 4.2, FCC, CE, RoHS
Driver Man.	YG
Chip Man.	Phillips

Electrical

Power Factor	0.99
Frequency	50/60 Hz
Max THD (%)	15
Operating Temp.	-30° F to 130° F -34° C to 54° C
Dimming	0-10V Dimming is optional

ALTECH MODEL #:	AE-L-WPSS-15
DLC #:	U-IWP-15
DLC Partner:	Ultron Industries
Input Wattage:	15W
Equivalent:	70-100W MH

Ordering Information

Example: AE-L-WPSS-15-50K-1-1-W-P-BL

Wtg	Color Temp.	Distribution	Input Voltage	Mounting	Options	Finish
15	30K - 3000K 40K - 4000K 50K - 5000K* 57K - 5700K	1 - 120°*	1 - 120-277V*	W - Wall*	WP - 4' Whip S - Shield DIM - Dimming MS - Motion Sensor	BL - Black* BZ - Bronze WH - White GR - Gray SP - Other

*Standard

Standard Color

Black

Custom Colors

Bronze

White

Silver

Gray

Orange

Brown

Blue

Green

Red



Notes:

- Only 5000K, 120-277V in BLACK are stocked locally, check for ETA's
- Photocell comes standard

Lumen Output

CCT	Lumens
3000K	1,815
4000K	1,875
5000K	1,935
5700K	3,080



Multi-Level Motion Sensor





Phenix External Emergency Inverter (18470X-3)

Installation

1. Disconnect all power sources (VERY IMPORTANT).
2. Mount the back plate on the wall with the expansion screws.




Photocell comes standard.

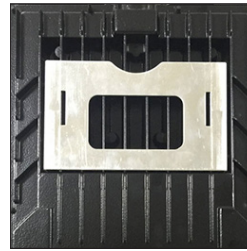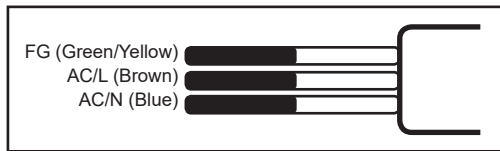

External heat sink designed especially for this wall pack. Not only does it extend the life span, but also makes it suitable for warmer locations.

3. Wire the fixture appropriately. **Brown is live. Blue is neutral. Green/Yellow is ground.**
4. Mount the fixture on the back plate.

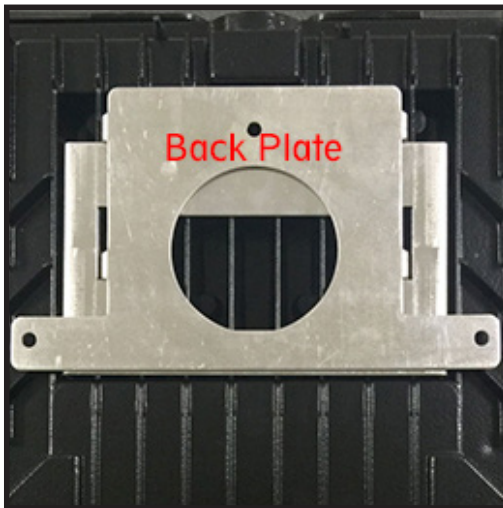

5. Insallation Complete.

Dimensions

